

Model
Category

Skyjack SJ3014 micro Scissor Lift

Working
Height

6.4m

Stowed Height

1.59m

Width

0.76m

Lifting
Capacity

240kg

Weight

820kg

Power

Battery



STANDARD FEATURES

- Drivable at full height
- Variable speed, rear wheel electric drive
- Dual holding brakes
- Upper control box with integrated steel shroud
- Tilt Sensor (3.5° x 2.5°)
- 0.51 m Roll out extension deck
- 24V DC power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tyres
- Pothole protection system
- Indoor Only (0 m/s wind rating)
- Tilt alarm with drive & lift cut-out
- Lowering alarm
- Lanyard attachment points
- Forklift pockets and tie down/lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Maintenance free AGM batteries
- Flashing lights
- Locking battery tray
- Pull-out tray for easy access
- Battery level indicator

IPAF Category **3a**

Do you hold a valid operator's licence?

The Powered Access Licence (PAL) Card is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

Quick checklist for employers and operators using powered access machines:

- ✓ **I have an IPAF PAL card**
- ✓ **Date is still valid (Licence expires after 5 years)**
- ✓ **All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).**



If you can answer yes to all three, you're good to go!

If not, please call us to discuss your requirements and arrange a training course.



Skyjack SJ3014 micro Scissor Lift

Dimensions	3014
A Work Height	6.4 m
B Raised Platform Height	4.4m
C Overall Width	0.76m
D Overall Length	1.49m
E Stowed Height (Rails Up)	2.05 m
F Stowed Height (Rails Down)	1.59m
G Platform Width (Inside Dimension)	0.76 m
H Platform Length (Inside Dimension)	1.28 m
Specifications	3014
Extension Deck (Roll Out)	0.51 m
Ground Clearance (Stowed)	6cm
Wheelbase	1.05 m
Weight	820kg
Gradeability	25%
Turning Radius (Inside)	0.35m
Lift Time (With Rated Load)	25 sec
Lower Time (With Rated Load)	18 sec
Drive Speed (Stowed)	3.0 km/h
Drive Speed (Raised)	0.8 km/h
Maximum Drive Height	Full Height
Lifting Capacity	240 kg
Distributed Capacity (Extension Deck)	100 kg
Local Floor Load (With Rated Load)	565 kN/m ²
Overall Floor Load (With Rated Load)	1322 kg/m ²
Maximum Persons (Indoor/Outdoor)	2
Tyre Type	Solid, N/M
Tyre Size	9 x 3

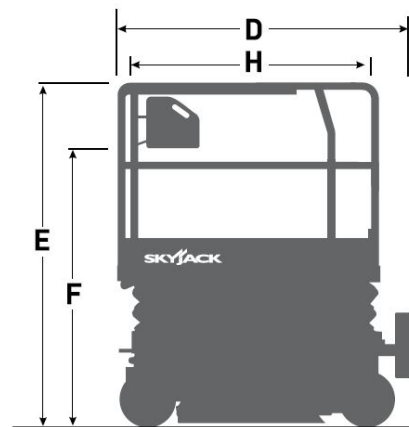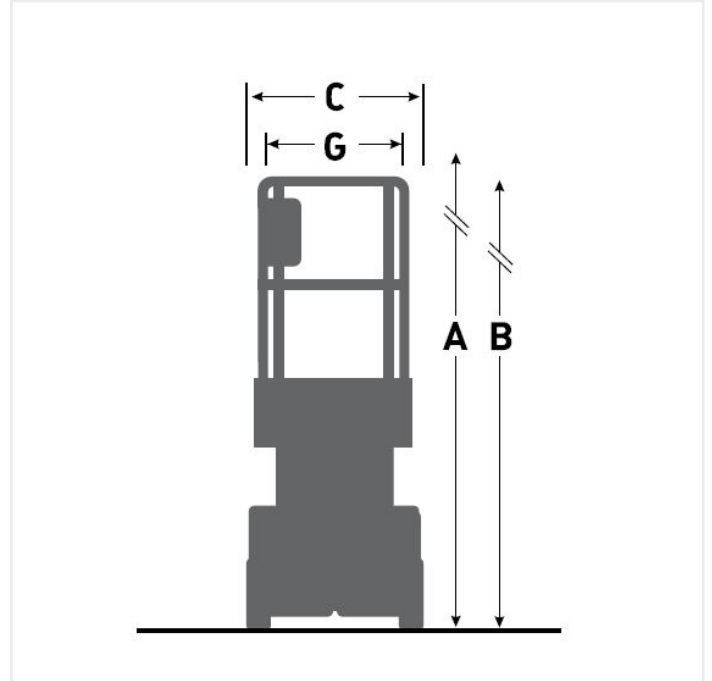

Special Features

- Skyjack's electrically powered scissor lifts offer a quiet, compact and versatile package with zero emissions, and are capable of manoeuvring in confined indoor and outdoor job sites and are suitable for a wide range of construction, maintenance and industrial applications
- Sturdy all steel design incorporates a manually operated roll out extension desk which increases work area and provides up-and-over capability
- Skyjack's unique clevis style design creates scissor ends that endure lower stress, and increased rigidity. This is achieved through symmetrical load distribution over the pins
- Removable, durable aluminium construction upper control box that's clear, intuitive, and easy to understand.

HIRE • SALES • TRAINING
0844 682 0000



**NATIONAL
COVERAGE**

**ACCESS
ALLIANCE**

We offer a true UK wide hire service via a network of strong regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

For more information head to our website **starplatforms.co.uk**