

Genie

GS-2669 RT

GS-3369 RT

GS-4069 RT

Rough Terrain Scissor Lifts



STANDARD FEATURES

- Drive at full height
- Folding guardrail with full height swing gate
- Platform controls with fault indicator
- Proportional lift and drive
- AC power to platform
- Front oscillating axle
- Positive traction control
- Four wheel drive
- Four wheel braking
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing beacons
- Horn
- Hour meter
- Certified load sensor
- Telematics-Ready Connector
- All engines are emissions compliant
- Swing-out engine tray
- Steel frame platform with replaceable aluminium deck
- Automatic levelling hydraulic outriggers

IPAF Category 3a

Do you hold a valid operator's licence?

The PAL Card (Powered Access Licence) is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

Quick checklist for employers and operators using powered access machines:

- ✓ I have an IPAF PAL card.
- ✓ Date is still valid (Licence expires after 5 years).
- ✓ All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).

If you can answer yes to all three, you're good to go!

If not, please call us to discuss your requirements and arrange a training course.






2669RT, 3369RT, 4069RT

Rough Terrain Scissor Lifts

Specifications	GS-2669 RT	GS-3369 RT	GS-4069 RT
Working height maximum	9.70 m	11.75 m	14.12 m
A Platform height maximum	7.70 m	9.75 m	12.12 m
B Platform height - stowed	1.47 m	1.47 m	1.65 m
C Platform length - outside	2.79 m	2.79 m	2.79 m
extended	4.31 m	4.31 m	4.31 m
Slide-out platform extension deck	1.52 m	1.52 m	1.52 m
D Platform width - outside	1.6 m	1.6 m	1.6 m
Toeboard height	0.15 m	0.15 m	0.15 m
E Height - stowed	2.59 m	2.59 m	2.74 m
rails lowered	1.92 m	1.92 m	2.08 m
F Length - stowed	3.12 m	3.12 m	3.12 m
platform extended	4.50 m	4.50 m	4.50 m
with outriggers	3.76 m	3.76 m	3.76 m
G Width	1.75 m	1.75 m	1.75 m
H Wheelbase	2.29 m	2.29 m	2.29 m
I Ground clearance - centre	0.24 m	0.24 m	0.24 m

Productivity	GS-2669 RT	GS-3369 RT	GS-4069 RT
Maximum platform occupancy (in/out)	4/4	4/2	3/2
Lift capacity	680 kg	454 kg	363 kg
Drive height	full height	full height	full height
Drive speed - stowed	5.6 km/h	5.6 km/h	5.6 km/h
Drive speed - raised	0.5 km/h	0.5 km/h	0.5 km/h
Gradeability - stowed	40%	35%	35%
Maximum outrigger levelling:			
front/back uphill	5.3°/4.2°	5.3°/4.2°	5.3°/4.2°
side to side	11.7°	11.7°	11.7°
Turning radius - inside	2.11 m	2.11 m	2.11 m 83 in
Turning radius - outside	4.6 m	4.6 m	4.6 m
Raise/lower speed	36/33 sec	42/28 sec	69/46 sec
Controls	proportional	proportional	proportional
Drive	four wheel	four wheel	four wheel
Tyres - rough terrain	30x66 cm	30x66 cm	30x66 cm

Weight	GS-2669 RT	GS-3369 RT	GS-4069 RT
CE base machine	3,376 kg	3,557 kg	4,744 kg
The basic unit has the extension deck, foam filled RT tyres (or non marking RT tyres as option), CE link guard and CE load sense.			
Unit weight modifiers for options			
Outriggers	add 392 kg	add 392 kg	add 392 kg
Generator	add 73 kg	add 73 kg	add 73 kg

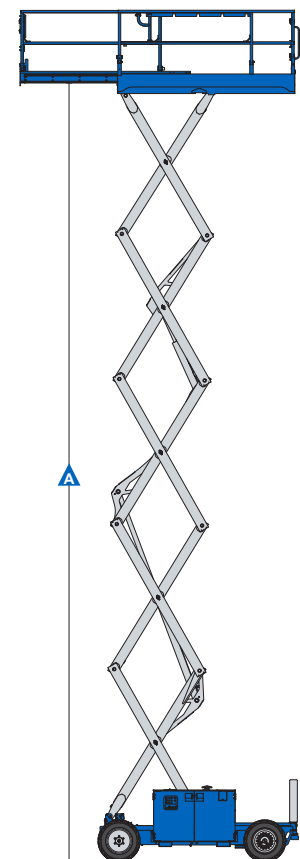

Hire • Sales • Training

0844 682 0000

www.starplatforms.co.uk

info@starplatforms.co.uk

UK Coverage

We offer a true UK wide hire service via a network of strong, regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

