

Skyjack

SJ9241/50 RT

Rough Terrain Scissors



STANDARD FEATURES

- Drivable at full height with powered decks fully extended (9241 only)
- Axle based 4WD
- "No Spin" rear differential and limited slip front differential
- Disc brake system on rear axle
- 29hp Kubota diesel engine on roll out tray
- Self centering scissor design
- Dual powered extension decks (1.53 m front and rear)
- Large 7.21 m total working platform length
- Independent/auto levelling outriggers
- Relay based control system
- Colour coded and numbered wiring system
- 30% gradeability
- Foamfilled grip lug tyres
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- Overload sensing system
- Lowering warning system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on both sides
- Scissor guards
- Lanyard attachment points
- Tie down/lift lugs

IPAF Category 3a

Do you hold a valid operator's licence?

The PAL Card (Powered Access Licence) is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

Quick checklist for employers and operators using powered access machines:

- ✓ I have an IPAF PAL card.
- ✓ Date is still valid (Licence expires after 5 years).
- ✓ All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).

If you can answer yes to all three, you're good to go!

If not, please call us to discuss your requirements and arrange a training course.





SJ9241/50 RT Rough Terrain Scissors

Dimensions	SJ9241 RT	SJ9250 RT
A Work Height	14.50 m	17.24 m
B Raised Platform Height	12.50 m	15.24 m
C Lowered Platform Height	1.68 m	2.01 m
D Overall Width	2.34 m	2.34 m
E Overall Length	4.47 m	4.47 m
F Stowed Height (Rails Up)	2.84 m	3.16 m
G Stowed Height (Rails Down)	1.98 m	2.29 m
H Platform Width (Inside Dimension)	1.88 m	1.88 m
I Platform Length (Inside Dimension)	7.21 m	7.21 m

Specifications	SJ9241 RT	SJ9250 RT
Extension Deck	1.53 m x 2	1.53 m x 2
Ground Clearance	0.20 m	0.20 m
Wheelbase	3.02 m	3.02 m
Weight	6,715 kg	7,407 kg
Gradeability	30%	30%
Turning Radius (Inside)	5.33 m	5.33 m
Turning Radius (Outside)	7.65 m	7.65 m
Lift Time (With Rated Load)	62 sec	64 sec
Lower time (With Rated Load)	72 sec	72 sec
Drive Speed (Stowed)	3.8 km/h	3.8 km/h
Drive Speed (Raised)	0.72 km/h	0.72 km/h
Maximum Drive Height	Full Height	9.14 m
Capacity (Overall)	681 kg	681 kg
Local Floor Load (With Rated Load)	1495 kPa	1576 kPa
Overall Floor Load (With Rated Load)	9 kPa	10 kPa
Maximum # of Persons (indoor/outdoor)	5/5	5/5
Tyre Type	Foam Filled	Foam Filled
Tyre Size	10 x 16.5	10 x 16.5

Model	Capacity		
	Main	Front Ext.	Rear Ext.
SJ9241 RT	227 kg	227 kg	227 kg
SJ9250 RT	227 kg	227 kg	227 kg

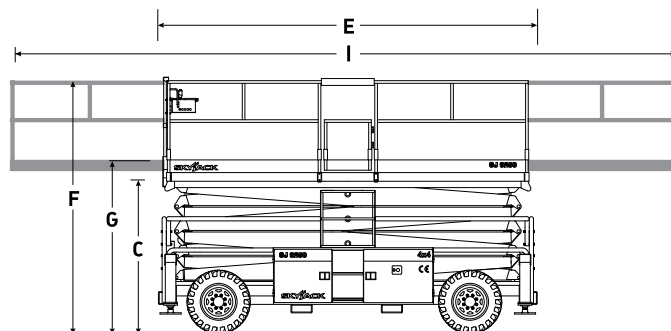

Hire • Sales • Training

0844 682 0000

www.starplatforms.co.uk

info@starplatforms.co.uk

UK Coverage

We offer a true UK wide hire service via a network of strong, regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

