



Skyjack SJ63 AJ

Articulating Boom

STANDARD FEATURES

- Drivable at full height
- Axle based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Oscillating axle
- 55.2 kw (74hp) diesel engine
- Straight boom functionality
- 360° continuous turret rotation
- 45% Gradeability
- Swing out engine tray
- Swing up cowlings
- Modular platform railing system
- Tri-entry sliding mid-rail
- Wiring for AC outlet to platform
- Direction sensing drive and steer controls
- Proportional controls
- Relay based control system
- Colour coded and numbered wiring
- Hourmeter
- Operator horn
- Overload sensing system
- Tie down/lifting lugs
- Wet disc SAHR brakes (front and rear axle)
- Grip lug foamfilled tyres

IPAF Category 3b

Do you hold a valid operator's licence?

The PAL Card (Powered Access Licence) is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

Quick checklist for employers and operators using powered access machines:

- ✓ I have an IPAF PAL card.
- ✓ Date is still valid (Licence expires after 5 years).
- ✓ All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).



If you can answer yes to all three, you're good to go!

If not, please call us to discuss your requirements and arrange a training course.



SJ63 AJ Articulating Boom

Dimensions	SJ63 AJ
Work Height	21.38 m
Platform Height	19.38 m
Horizontal Reach	12.19 m
Up and Over Height	8.38 m
A Platform Size	0.91 x 1.83 m
B Stowed Width	2.44 m
C Tailswing	Zero
D Stowed Height	2.54 m
E Stowed Length	9.14 m
F Wheelbase	2.44 m
G Ground Clearance	0.33 m
Specifications	SJ63 AJ
Rotation	360°
Platform Rotation	170°
Jib Length	1.68 m
Jib Range +/-	+65° / -60°
Weight	10,200 kg
Gradeability	45%
Turning Radius (Inside)	2.21 m
Turning Radius (Outside)	5.31 m
Axle Oscillation	10.16 cm
Drive Speed (High speed)	7.3 km/h
Capacity	227 kg
Local Floor Load (With Rated Load)	1195 kPa
Overall Floor Load (With Rated Load)	12.4 kPa
Maximum # of Persons	2
Tyre Type	Grip lug foamfilled
Tyre Size	10.5 x 17.5
Diesel Engine	55.2 kw (74hp)
Fuel Tank Capacity	115L
Hydraulic Reservoir	115L

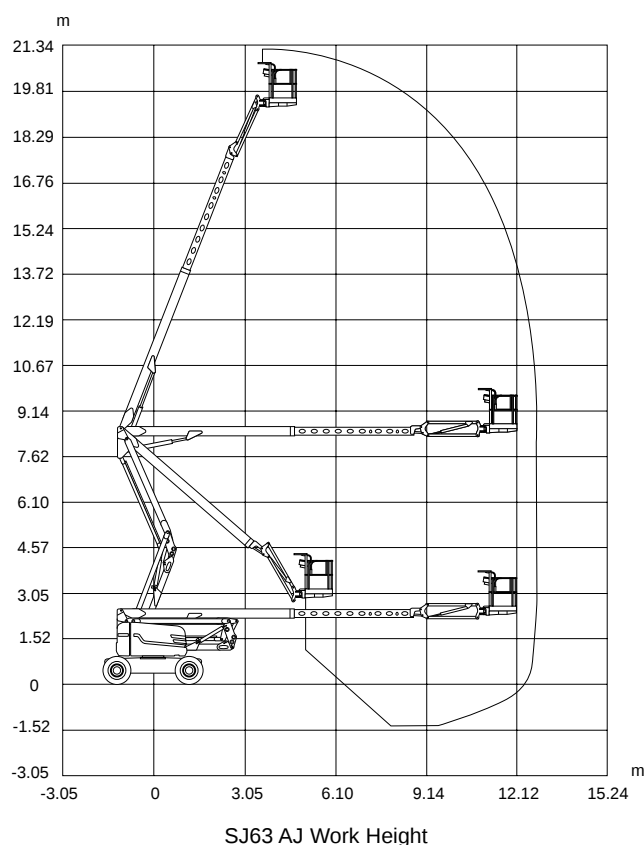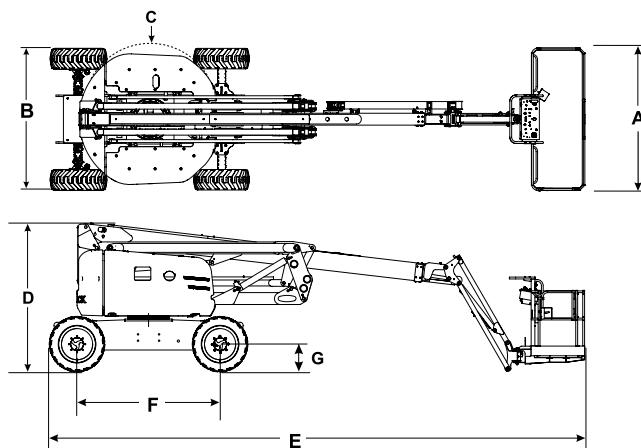

Hire • Sales • Training

0844 682 0000

www.starplatforms.co.uk

info@starplatforms.co.uk

UK Coverage

We offer a true UK wide hire service via a network of strong, regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

ACCESS ALLIANCE

