



Niftylift HR15N Articulating Boom

The new Height Rider 15N (HR15N) will lift 2 men and their tools to a working height of 15.5m or a working outreach of 9.7m. Its practical 180° rotating cage and fly-boom coupled with fully proportional multi-function controls deliver exceptional precision when positioning, making tasks quicker and easier to perform.

An impressive working outreach with zero tail-swing helps the HR15N to reach awkward jobs, especially when space is limited, and its super-efficient power system allows the batteries to work for longer, so more tasks can be completed and running costs reduced.

The HR15N also incorporates Niftylift's ToughCage, and multi-award winning SiOPS® safety system which eliminates sustained involuntary operation by instantly stopping machine movement if the operator is pushed onto the control console.

The HR15N's 1.5m width and sub 2m height enables travel through restricted spaces. Optional non-marking tyres mean that it can work both inside and out making it ideal for industrial or maintenance work.

The HR15N is available with two power options. You can choose from a super-efficient battery-only power system, or Niftylift's revolutionary Hybrid power system, delivering the ultimate combination of environmentally conscious efficiency and performance.

180° Platform Rotation with Fly-Boom
Improving operator access

ToughCage with SiOPS® as Standard
Multi-award winning operator protection

Proportional Multi-Function Control
Fast & precise operation

Efficient Power System
Maximising battery output to do more with each charge

Hybrid Power Option
Versatile, fuel efficient & environmentally conscious

IPAF Category 3b

Do you hold a valid operator's licence?

The PAL Card (Powered Access Licence) is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

Quick checklist for employers and operators using powered access machines:

- ✓ I have an IPAF PAL card.
- ✓ Date is still valid (Licence expires after 5 years).
- ✓ All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).




If you can answer yes to all three, you're good to go!

If not, please call us to discuss your requirements and arrange a training course.



HR15N Articulating Boom

Dimensions	HR15N
A Work Height	15.50 m
B Platform Height	13.50 m
C Horizontal Reach	9.70 m
D Width	1.50 m
E Stowed Height	1.99 m
F Stowed Length	6.40 m
G Transport Length	4.93 m
Weight	7,250 kg
Turning Radius	3.50 m
Platform Capacity	225 kg
Platform Size	1.50 m x 0.80 m
Platform Rotation	180°
Fly-Boom Arc	150°
Drive Speed	2.2 mph
Gradeability	25% (14°)
Power Options	Battery Only Hybrid (Battery & Diesel)

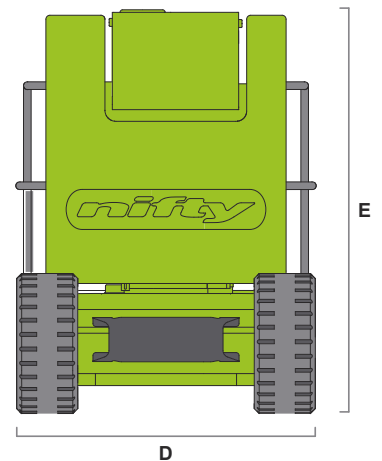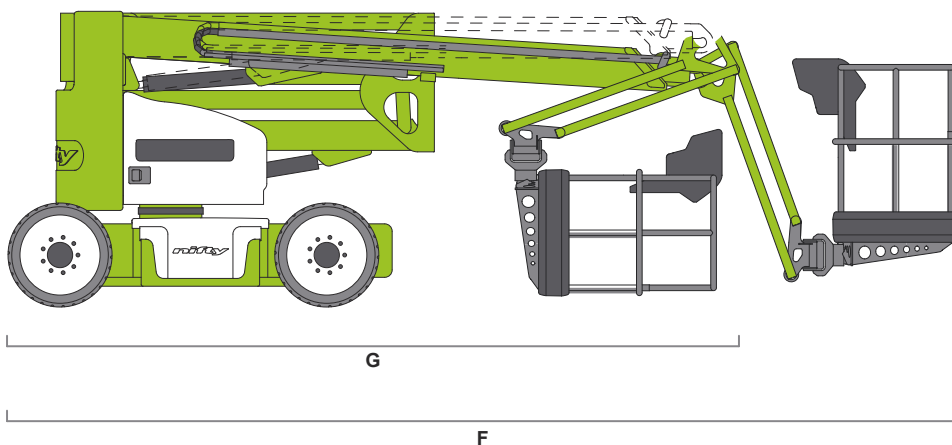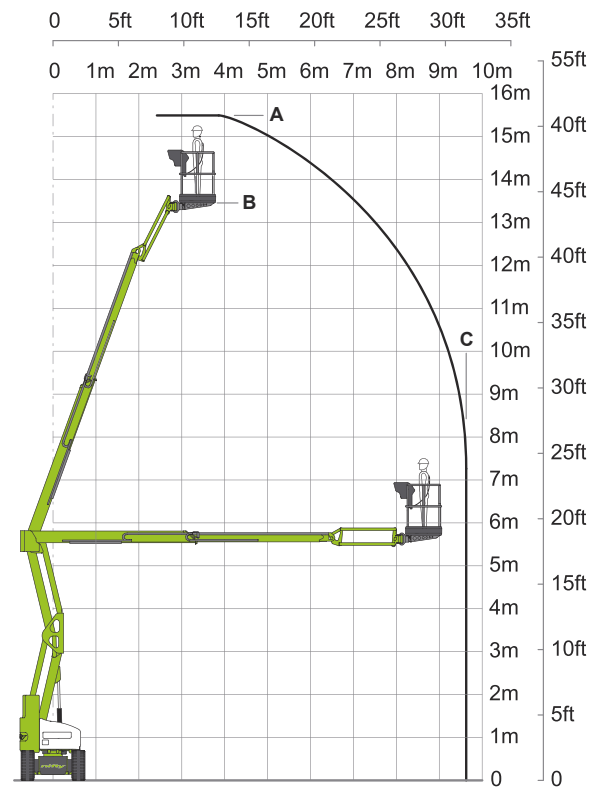

Hire • Sales • Training

 **0844 682 0000**

www.starplatforms.co.uk

info@starplatforms.co.uk

UK Coverage

We offer a true **UK wide hire service** via a network of strong, regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

