

Model
Category

Dingli JCPT1418RT

4x4 Rough Terrain Diesel Scissor Lift

Working Height

14.3m

Stowed Height

2.74m

Width

1.76m

Lifting Capacity

363kg

Weight

5,050kg

Power

Diesel



STANDARD FEATURES

- 4WD
- Extended Platform
- Proportional controls
- Self-lock gate on platform
- Drivable at full height
- Foam-filled non marking tyres
- Swing-out engine tray
- Emergency lowering system
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor & overload sensor with alarm
- Anti-restart engine protection
- All Motion Alarm
- Hour meter
- Safety brackets
- Folding guardrails
- European III emission engine
- Flashing Beacon
- Oscillating Axle
- Forklift pockets
- Automatic leveling hydraulic outriggers
- AC power to platform
- Platform work lights
- Hydraulic generator
- Hydraulic water pump

IPAF Category **3a**

Do you hold a valid operator's licence?

The Powered Access Licence (PAL) Card is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

Quick checklist for employers and operators using powered access machines:

- ✓ **I have an IPAF PAL card**
- ✓ **Date is still valid (Licence expires after 5 years)**
- ✓ **All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).**


If you can answer yes to all three, you're good to go!

If not, please call us to discuss your requirements and arrange a training course.



Dingli JCPT1418RT Rough Terrain Electric Scissor Lift

Dimensions	JCPT1418RT
A Work Height	14.30m
B Raised Platform Height	12.30m
C Overall Length	3.84m
D Overall Width	1.76m
E Stowed Height (Rails Down)	1.97m
F Stowed Height (Rails Up)	2.74 m
G Platform extension	1.43 m
H Wheelbase	2.29 m
Specifications	JCPT1418RT
Platforms size	2.88x1.52 m
Ground Clearance (Stowed)	0.24cm
Weight	5,050kg
Gradeability	40%
Turning Radius (Inside)	2.15m
Lift Time (With Rated Load)	45 sec
Lower Time (With Rated Load)	46 sec
Drive Speed (Stowed)	5.20 km/h
Drive Speed (Raised)	0.48km/h
Lifting Capacity	363 kg
Distributed Capacity (Extension Deck)	136 kg
Local Floor Load (With Rated Load)	565 kN/m ²
Overall Floor Load (With Rated Load)	1322 kg/m ²
Maximum Persons (Indoor/Outdoor)	3
Tyre Type	Solid, N/M
Tyre Size	26x12-16.5
Diesel Engine	18.6kW/2400rpm

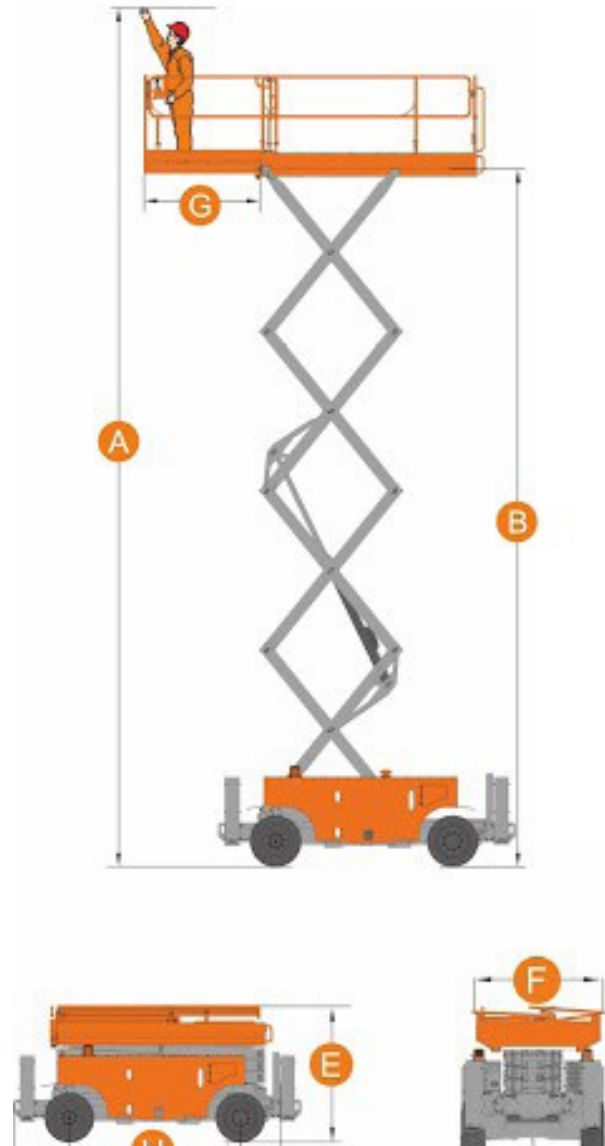

TRAINING

SALES

HIRE



0844 682 0000

**NATIONAL
COVERAGE**



We offer a true UK wide hire service via a network of strong regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

For more information head to our website **starplatforms.co.uk**

This brochure is for illustrative purpose only and based on the latest information at the time of printing. CE marked work platforms are in conformance to Machinery Directive 2006/42/EC. E&OE